



Configuration used for determination 用於特性的配置
EMI 特性 Electro-Magnetic interference characteristics
(1)Conducted Emission

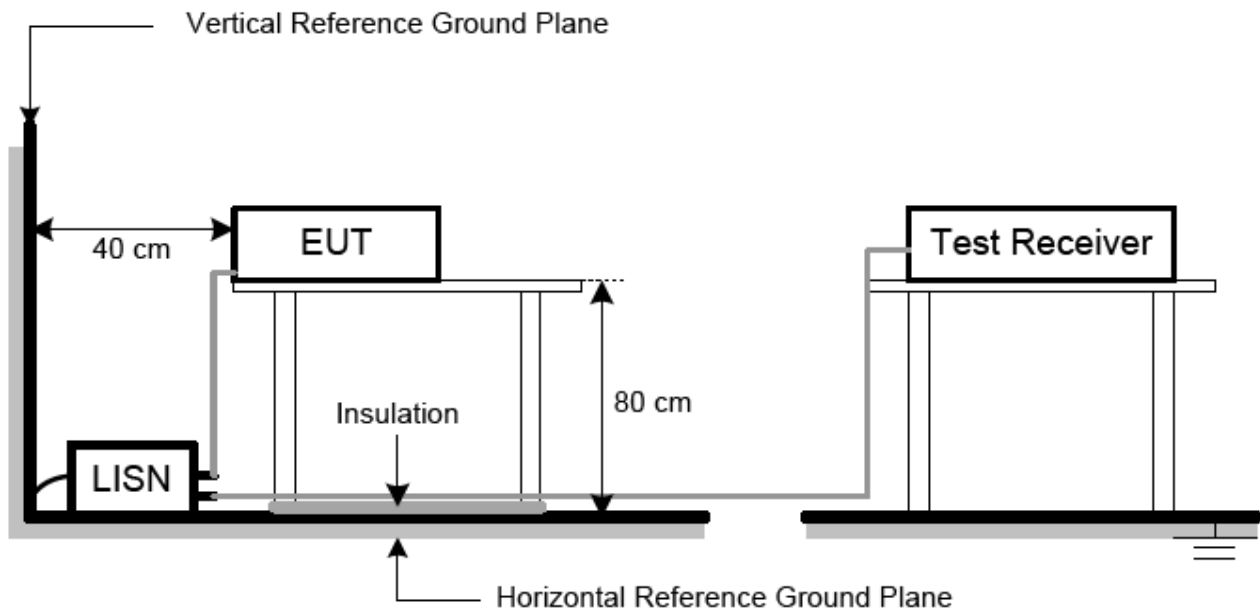

(2)Radiated Emission

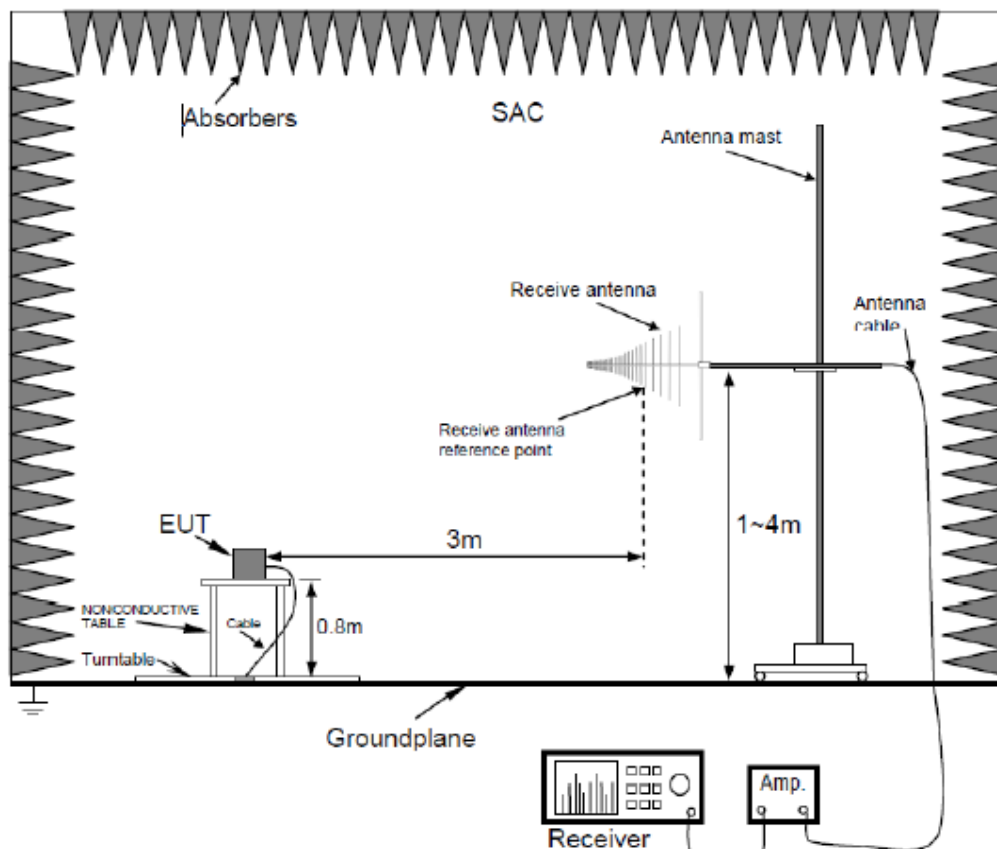

Conduction Character (傳導特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS


※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	外面實驗室
2	AC Source(變頻器)	外面實驗室
3	Character Standard	CISPR32 CLASS B

※Character Data(特性數據):

ITEM	QP	AV
Character Result		
L line	/	-19.11dB
N line	/	-22.67dB

※Character Waveform (特性波形):

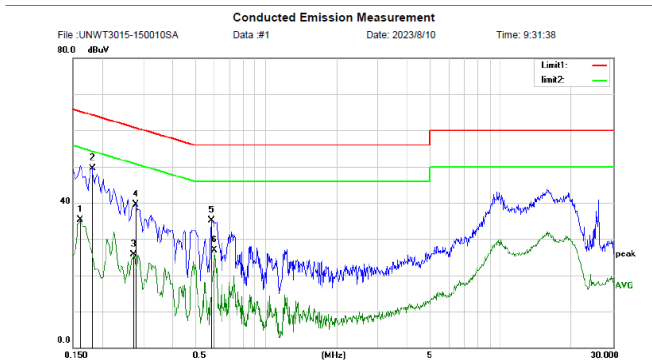


Site :ATT Conducted Emission Test Site (1) Phase: **L1** Temperature: 23.7
 Limit: (CE)CISPR32 class B_QP Power: AC 100V/60Hz Humidity: 54 %
 EUT:
 M/N: UNS(UNB)WT3015-150010SA
 Mode: FULL LOAD
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dB	dB	Detector	Comment
1		0.1620	24.73	10.55	35.28	55.65	-20.37	AVG	
2	*	0.1819	38.94	10.55	49.49	65.09	-15.60	peak	
3		0.2740	15.15	10.52	25.67	52.46	-26.79	AVG	
4		0.2779	29.07	10.51	39.58	62.34	-22.76	peak	
5		0.5860	24.56	10.58	35.14	56.00	-20.86	peak	
6		0.6020	16.32	10.57	26.89	46.00	-19.11	AVG	

*:Maximum data x:Over limit l:over margin

File :UNWT3015-150010SA\Data.#1

Page: 1

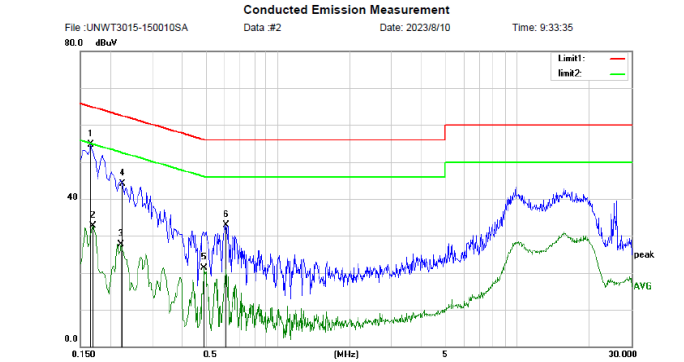

Site :ATT Conducted Emission Test Site (1) Phase: **N** Temperature: 23.7
 Limit: (CE)CISPR32 class B_QP Power: AC 100V/60Hz Humidity: 54 %
 EUT:
 M/N: UNS(UNB)WT3015-150010SA
 Mode: FULL LOAD
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dB	dB	Detector	Comment
1	*	0.1660	44.18	10.55	54.73	65.54	-10.81	peak	
2		0.1700	22.20	10.56	32.76	55.43	-22.67	AVG	
3		0.2220	17.14	10.53	27.67	53.94	-26.27	AVG	
4		0.2260	33.52	10.52	44.04	63.83	-19.79	peak	
5		0.4940	10.64	10.63	21.27	46.17	-24.90	AVG	
6		0.6100	22.43	10.57	33.00	56.00	-23.00	peak	

*:Maximum data x:Over limit l:over margin

File :UNWT3015-150010SA\Data.#2

Page: 1

Conduction Character (傳導特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS


※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	外面實驗室
2	AC Source(變頻器)	外面實驗室
3	Character Standard	CISPR32 CLASS B

※Character Data(特性數據):

ITEM	QP	AV
L line	/	-16.31dB
N line	/	-21.79dB

※Character Waveform (特性波形):

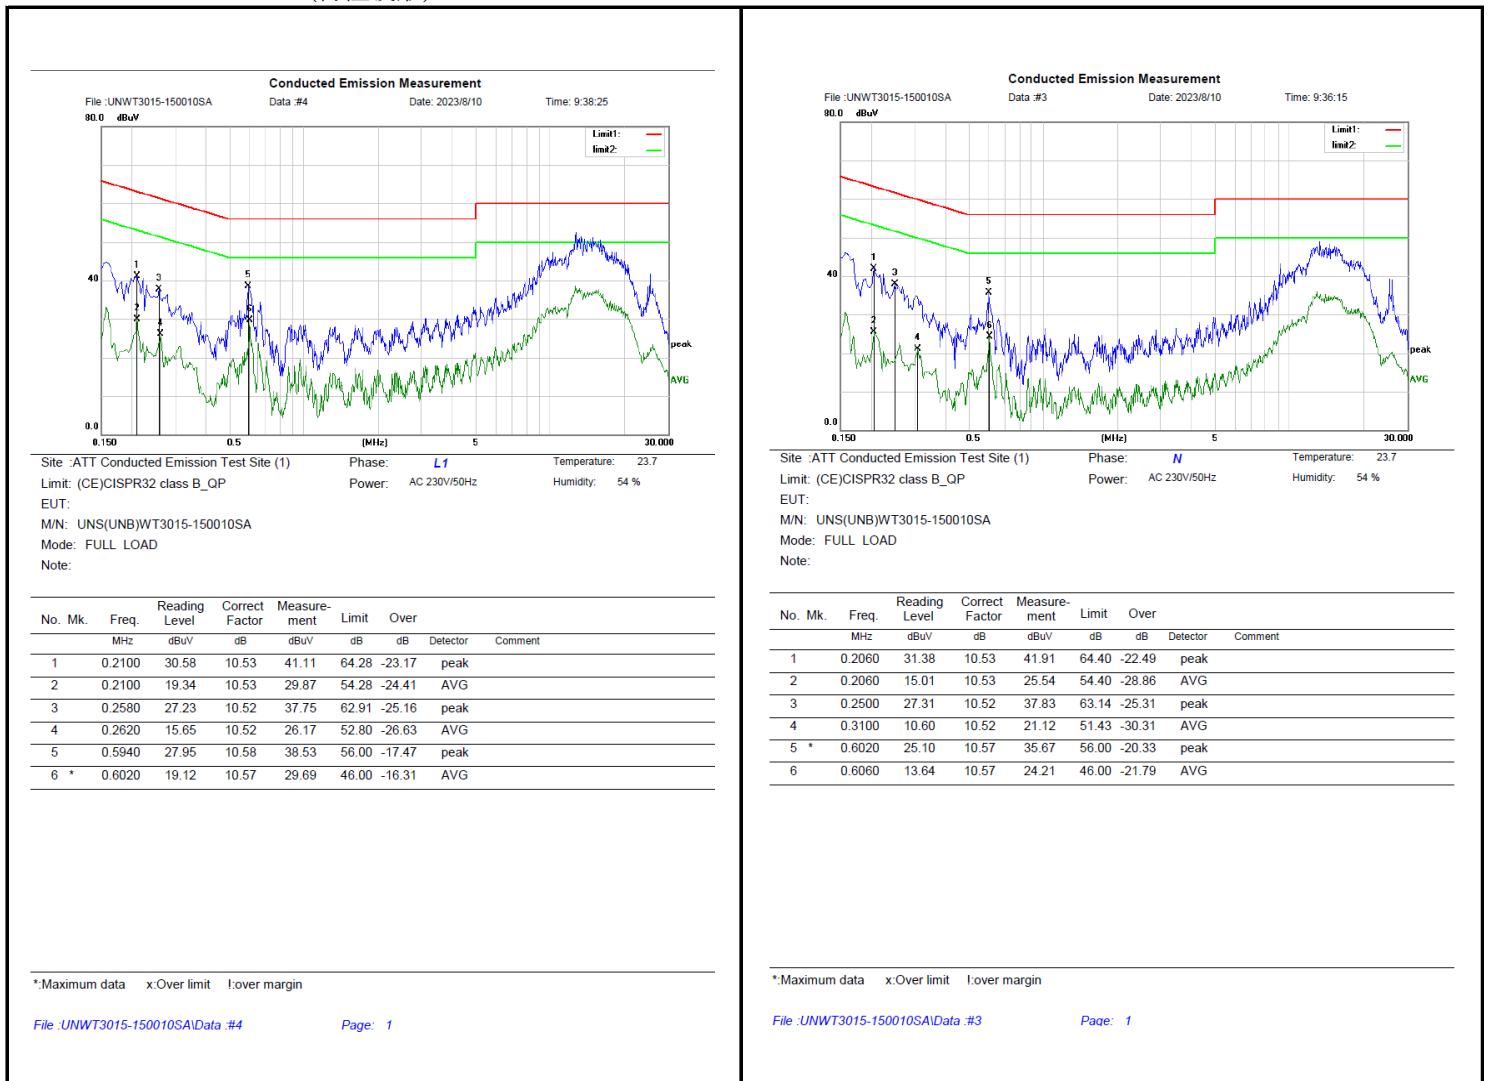

Radiation Character (輻射特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS


※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	外面實驗室
2	AC Source(變頻器)	外面實驗室
3	Character Standard	CISPR32 CLASS B

※Character Data(特性數據):

ITEM	peak	QP
Character Result	V line	-12.41dB
	H line	-13.1dB

※Character Waveform (特性波形):

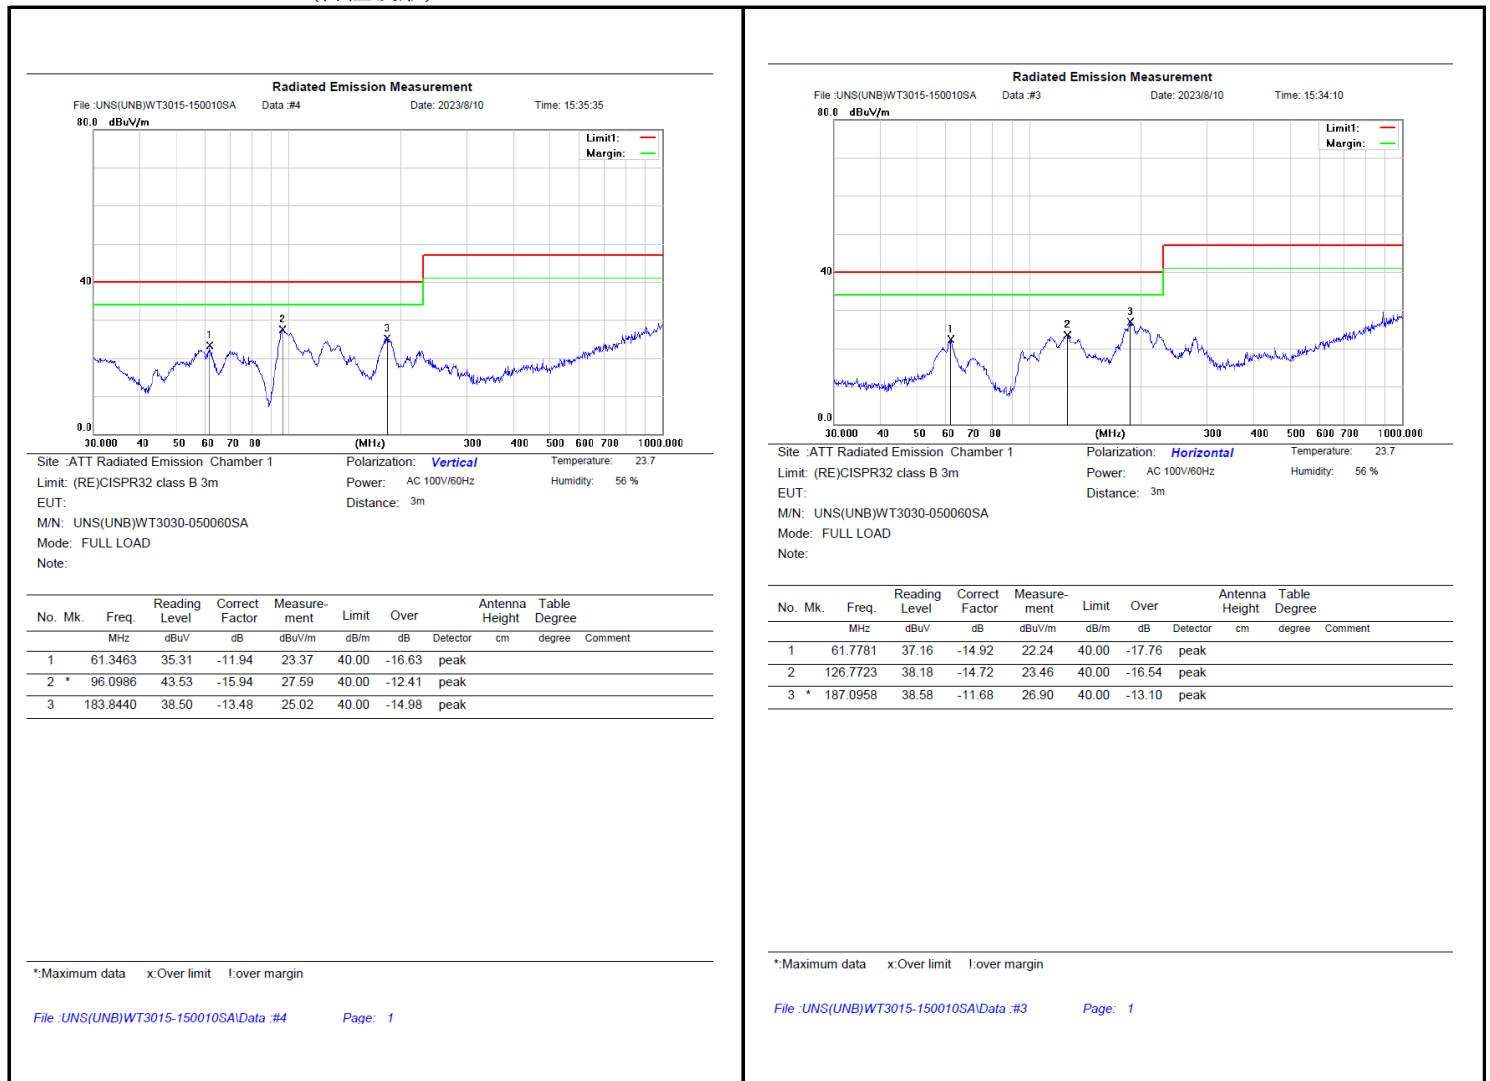

Radiation Character (輻射特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS


※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	外面實驗室
2	AC Source(變頻器)	外面實驗室
3	Character Standard	CISPR32 CLASS B

※Character Data(特性數據):

ITEM		peak	QP
Character Result	V line	-9.68dB	/
	H line	-11.95dB	/

※Character Waveform (特性波形):

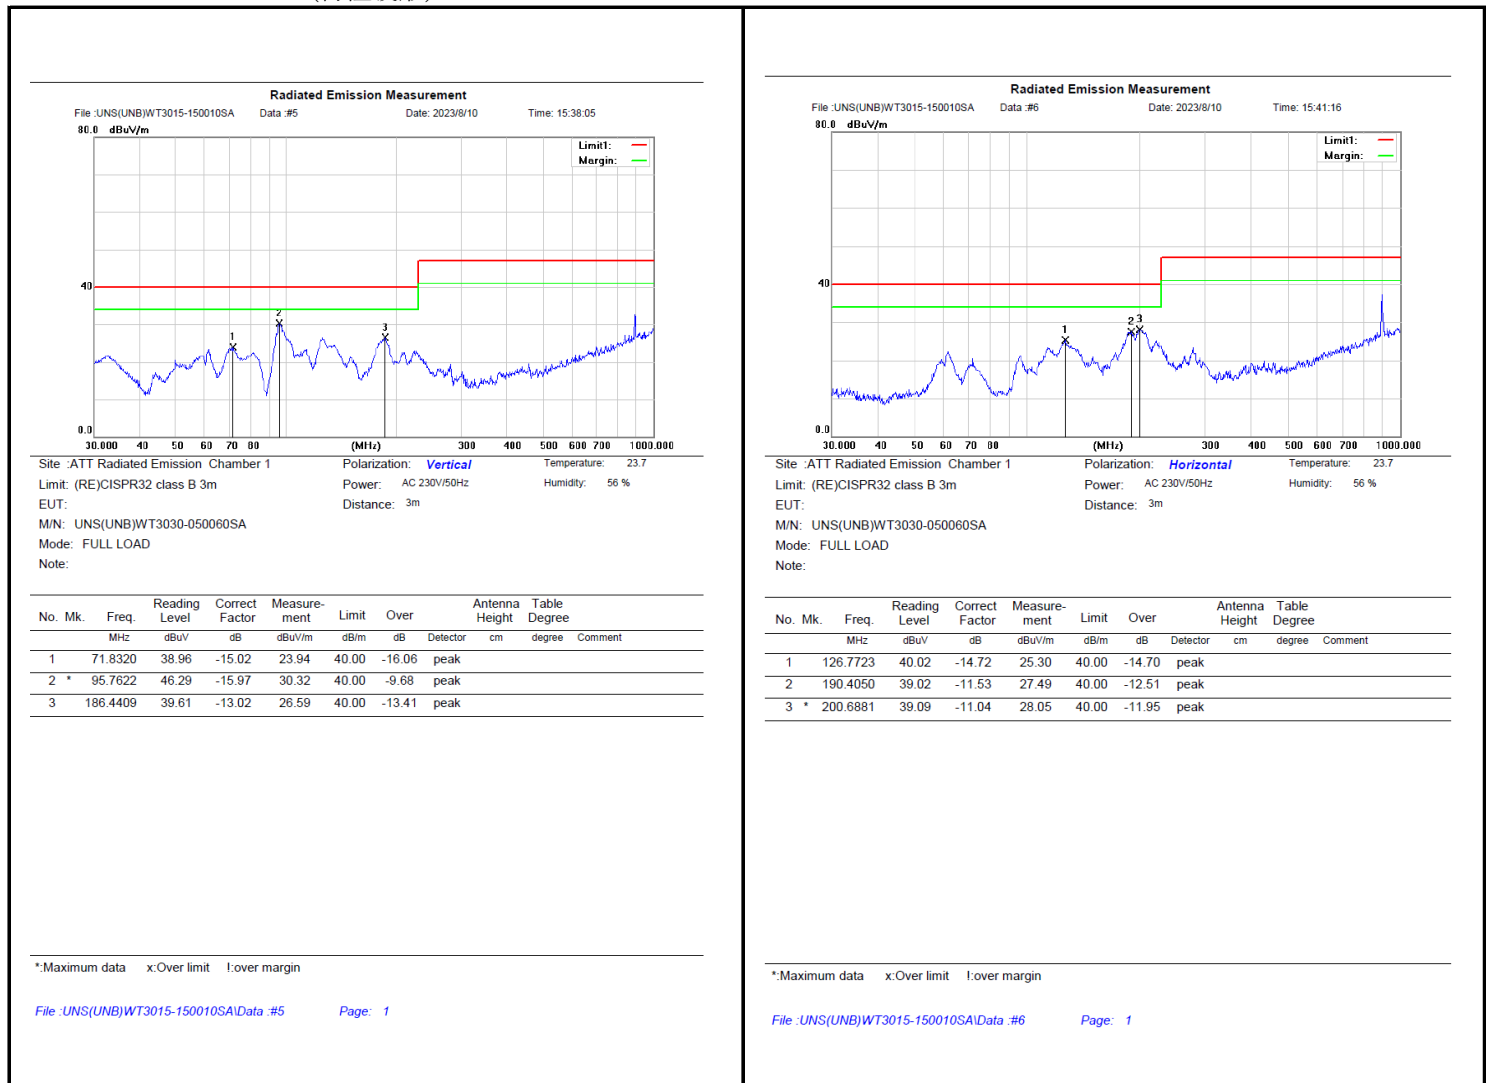

EFT Character (電子脈衝群干擾特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	BEST EMC SOLUTION	EMCSOSIN / EFT-S4
2	AC Source(變頻器)	ALL POWER/APG-1005N

※Character Standard(特性標準) :

1	Character Standard	IEC 61000-4-4
EFT Character		
	Spec.	1KV
	O/P	Full Load
	I/P	100Vac/60Hz & 230Vac/50Hz
	Burst	15ms/300ms
	Character Duration	1 min
	Pulse Rate:	5KHz/100KHz

※Character Data(特性數據) 產品類別: Class I

Power Line	Pulse Polarity	Character Voltage	Required Criteria	Complied To Criteria(A,B,C)	Judgement
L	"+" / "-"	1.0KV	Criteria B	Criteria A	PASS
N	"+" / "-"	1.0KV	Criteria B	Criteria A	PASS
L-N	"+" / "-"	1.0KV	Criteria B	Criteria A	PASS
PE	"+" / "-"	1.0KV	Criteria B	Criteria A	PASS
L-PE	"+" / "-"	1.0KV	Criteria B	Criteria A	PASS
N-PE	"+" / "-"	1.0KV	Criteria B	Criteria A	PASS
L-N-PE	"+" / "-"	1.0KV	Criteria B	Criteria A	PASS

※Character Performance & Result :

- ☒ Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- ☐ Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- ☐ Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

ESD Character (靜電干擾特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	EMC-PARTNER	PRIMA /ESD61002TB
2	AC Source(變頻器)	ALL POWER/APG-1005N

※Character Standard(特性標準) :

1	Character Standard	IEC 61000-4-2:2001
ESD Character		
Spec.	Air: ±8.0KV	Contact: ±4.0KV
O/P	Full Load	
I/P	100Vac/60Hz & 230Vac/50Hz	
Description of Observation:	NO Abnormal Issue	
Performance Criterion:	Manufacturer (According to Standard/Manufacturer)	

※Character Data(特性數據) :

Item	Amount of Discharge	Voltage	Required Criteria	Complied To Criteria(A,B,C)	Judgement
Air Discharge	Mini 10/Point	±8.0KV	Criteria B	Criteria A	PASS
Contact Discharge	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(HCP)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Front)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Left)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Back)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Right)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS

※Character Performance & Result :

- ☒ Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- ☐ Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- ☐ Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

Light Surge Character (雷擊特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	EMC-PARTNER	Prima/ SUG61005TAX
2	AC Source(變頻器)	ALL POWER/APG-1005N

※Character Standard(特性標準) :

1	Character Standard	IEC 61000-4-5:1995+ A1:2001
SURGE Character		
Spec.	Line to Line $\pm 1KV$; Line to FG $\pm 2KV$	
O/P	Full load	
I/P	100Vac/60Hz & 230Vac/50Hz	
REP.RATE	60 sec	
Description of Observation:	NO Abnormal Issue	
Performance Criterion:	Manufacturer (According to Standard/Manufacturer)	

※Character Data(特性數據) 產品類別: Class I

Character Point	Character Voltage	Polarity	Phase Angle				Required Criteria	Complied To Criteria(A,B,C)	Judgement
			0°	90°	180°	270°			
L-N	1KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS
L-GND	2KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS
N-GND	2KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS
L,N-GND	2KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS

Class II Type : Character L-N Only.

※Character Performance & Result :

- ☒ Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- ☐ Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- ☐ Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

DIPS Character(周波跌落特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100~230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz/60Hz
3	Output load(輸出負載)	Full load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS
6		

※Character Parameters(特性參數):

DIPS Character	
Condition :	According EN61000-4-11 (full load and high line)
	Voltage Dips 100% Redaction 10ms/20ms ; 60% Redaction 200ms/240ms ; 30 % Redaction 500 ms/600ms Voltage Interruption : $\geq 95\%$; Redaction 5000ms/6000ms

※Character Data(特性數據):

Character Level	% UT	Reduction (%)	Duration (Periods)	Perform Criteria	Results	Judgement
0		100	0.5/1	B	Criteria A	PASS
40		60	10/12	C	Criteria B	PASS
70		30	25/30	C	Criteria A	PASS
0		100	250/300	C	Criteria B	PASS

※Character Performance & Result :

- Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- Criteria C:** Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

Radiated Radio-Frequency Electromagnetic Field Immunity Character (IEC61000-4-3) (RS特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	廠外部實驗室
2	AC Source(變頻器)	廠外部實驗室

※Character Standard(特性標準)：

RS TEST DATA						
Freq.Range(MHz)	RF Field Position	R.F. Field Strength	Azimuth	Perform Criteria	Results	Judgment
80MHz-1000MHz	Vertical/Horizontal	1V(rms) AM Modulated 1000Hz, 80%	Front	A	A	PASS
			Back			
			Left			
			Right			

Conducted Disturbances Induced by Radio-Frequency Field Immunity Character (IEC61000-4-6) (CS特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	廠外部實驗室
2	AC Source(變頻器)	廠外部實驗室

※Character Standard(特性標準)：

CS TEST DATA					
Test Ports (Mode)	Freq.Range(MHz)	Field Strength	Perform Criteria	Results	Judgment
Input/Output AC. Power Port	0.15-80MHz	3V(rms) AM Modulated 1000Hz, 80%	A	A	PASS

Power Frequency Magnetic Field Immunity Character (IEC61000-4-8) (PFMF特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz/ 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	廠外部實驗室
2	AC Source(變頻器)	廠外部實驗室

※Character Standard(特性標準)：

Magnetic Field Immunity					
Test Ports (Mode)	Frequency(Hz)	Field Strength	Perform Criteria	Results	Judgment
X Orientation	50/60	1A/m	A	A	PASS
Y Orientation			A	A	PASS
Z Orientation			A	A	PASS