

UNDE 200W Series

I.C.T./AV AC/DC Adaptor Standard Product



▲ UNDET3200



▲ UNDEC3200



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Energy and High Efficiency
- Suitable for audio, video, information and communications technology equipment

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

Safety Standard

- 60950-1
- 62368-1
- PSE 別表第八準拠

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Emissions

- FCC
 - FCC Part15-B
- CE
 - EN(CISPR)55032-B
- VCCI-B
- BS EN 55032

Immunity

- EN55035
 - BS EN 55035
- The above specifications include the following test standards
- ✓ EN61000-4-2
 - ✓ EN61000-4-3
 - ✓ EN61000-4-4
 - ✓ EN61000-4-5
 - ✓ EN61000-4-6
 - ✓ EN61000-4-8
 - ✓ EN61000-4-11

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	
Power Factor	ACIN 100V	-	0.95	-	-
	ACIN 230V	-	0.9	-	-

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection, Sea Level
Storage Temperature	-20	-	65	°C	Free Convection, Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


Typical model list

Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option / Remark
UNDEx3200-120150SA	12.0V	15.0A	±5%	120mV	240mV	88.00%	0.21W	
UNDEx3200-190105SA	19.0V	10.52A	±5%	190mV	380mV	88.00%	0.21W	
UNDEx3200-240084SA	24.0V	8.33A	±5%	240mV	480mV	88.00%	0.21W	
UNDEx3200-480042SA	48.0V	4.16A	±5%	480mV	480mV	88.00%	0.21W	
UNDEx3200-540037SA	54.0V	3.7A	±5%	480mV	480mV	88.00%	0.21W	

■ Measurement Condition

- Measurements shall be made with an oscilloscope with 20MHz bandwidth.
- Outputs shall be by passed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

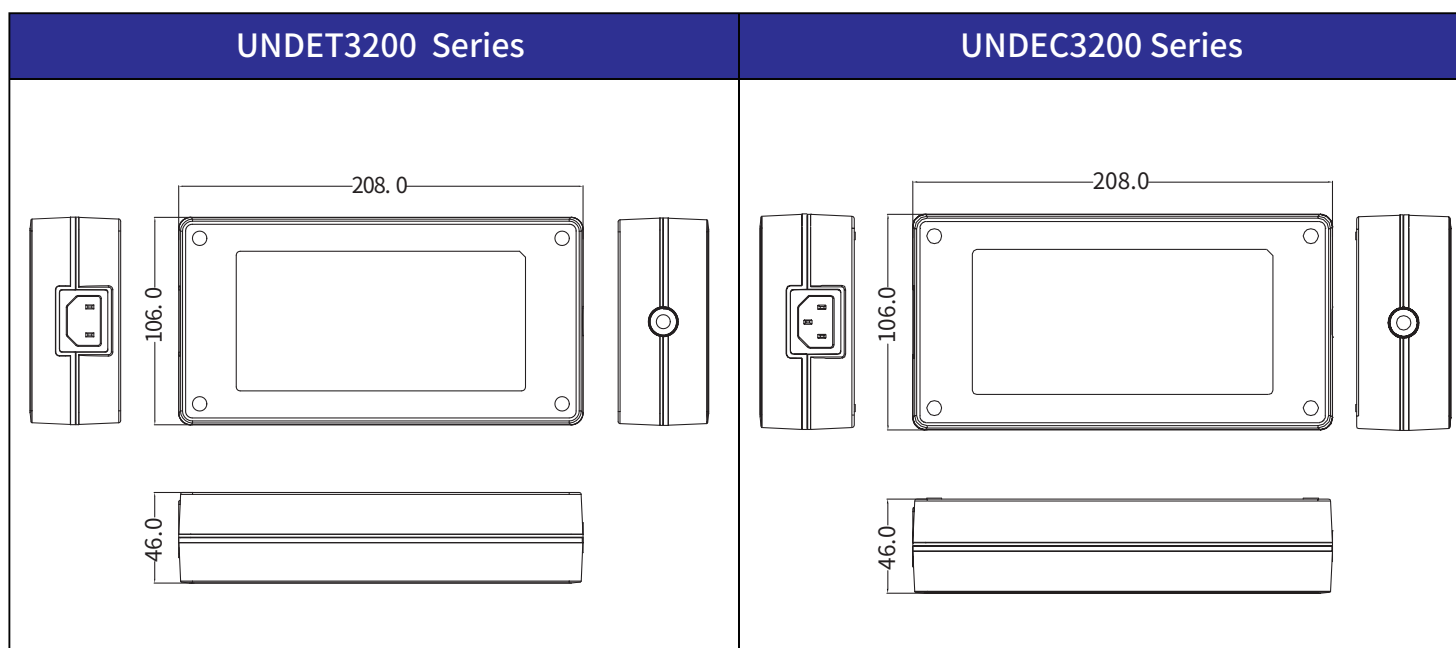

■ Please contact our sales department for details of each model ■