

# UNUB 6W Series

I.C.T. / AV AC/DC Adaptor  
**USB**  
**USB-A**




▲ UNUBU3006



▲ UNUBY3006



■ Please contact our sales department for safety standard of each model.



## Product Highlights

- Stability
- Energy and High Efficiency
- Small size
- Mobility
- Suitable for mobile phone/portable device, etc.
- Meet BC 1.2

## Efficiency

- Energy Efficiency Level VI(ErP/DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

## Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection

## Emissions

- FCC
  - FCC Part15-B
- CE
  - EN(CISPR)55032-B
- VCCI-B

## Safety Standard

- 62368-1
- 60065-1
- 60950-1
- PSE 別表第八 100V 基準に準拠

## Immunity

- EN55035
- The above specifications include the following test standards
- ✓ EN61000-4-2
  - ✓ EN61000-4-3
  - ✓ EN61000-4-4
  - ✓ EN61000-4-5
  - ✓ EN61000-4-6
  - ✓ EN61000-4-8
  - ✓ EN61000-4-11

# Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


# Typical model list

Output Condition	Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option / Remark
USB-A	UNUBx3006-050500SA	5.0V	0.5A	±5%	150mV	150mV	73.16%	0.1W	
	UNUBx3006-050010SA	5.0V	1.0A	±5%	150mV	150mV	73.62%	0.1W	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

# Mechanical Spec

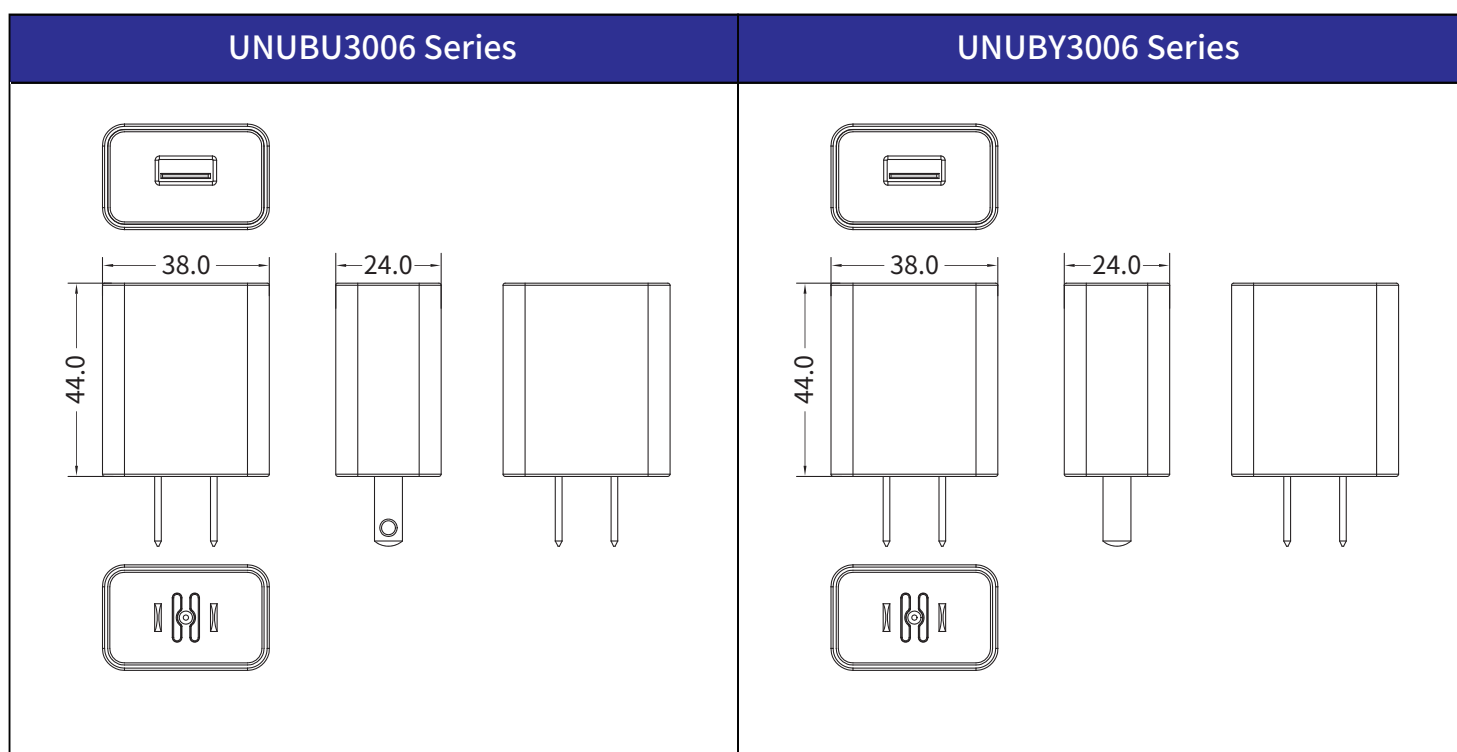

■ Please contact our sales department for details of each model ■