

UNVE 10W Series

I.C.T./AV AC/DC Adaptor Compact Design

UNVEL1010/UNVEL3010



Product Highlights

- Stability
- Energy and High Efficiency
- Small size
- Light weight
- Suitable for audio, video, information and communications technology equipment

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection

Safety Standard

- 62368-1
- PSE 別表第八

Emissions

- FCC
 FCC Part15-B
- CE
- EN(CISPR)55032-B
- VCCI-B

Immunity

EN55035

The above specifications include the following test standards

- ✓ EN61000-4-2
- ✓ EN61000-4-3
- ✓ EN61000-4-4
- ✓ EN61000-4-5
- ✓ EN61000-4-6
- ✓ EN61000-4-8
- ✓ EN61000-4-11

۷1



Electrical Spec

Input								
Description	Min.	Тур.	Max.	Units	Comment			
Voltage	90	100~240	264	Vac				
Frequency	47	50/60	63	Hz				

Environmental								
Description	Min.	Тур.	Max.	Units	Comment			
Operating Temperature	0	-	40	°C	Free Convection,Sea Level			
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level			
Operating Humidity	5	-	95	%RH	No Condensing			
Storage Humidity	5	-	95	%RH	No Condensing			

Typical model list


Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option / Remark
UNVEL3010-050020SA	5.0V	2.0A	±5%	200mV	300mV	78.70%	0.1W	

Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.

2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

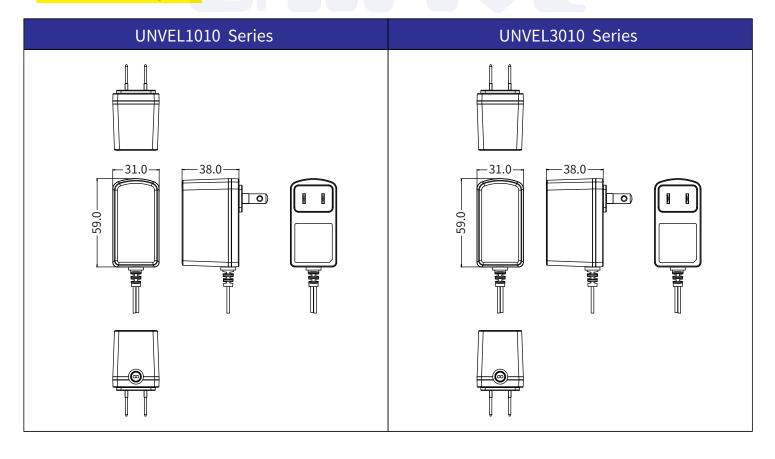

Please contact our sales department for details of each model

UNVE 10W Series

۷1