

UNWVU 10W Series

I.C.T./AV AC/DC Adaptor
Compact Design
Foldable AC Plug



▲ UNWVU3010



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Energy and High Efficiency
- Small size
- Light weight
- Suitable for audio, video, information and communications technology equipment

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

Emissions

- FCC
 - FCC Part15-B
- CE
 - EN(CISPR)55032-B
- VCCI-B

Safety Standard

- 60950-1
- 62368-1
- PSE 別表第八 100V 基準に準拠

Immunity

- EN55035
- The above specifications include the following test standards
- ✓ EN61000-4-2
 - ✓ EN61000-4-3
 - ✓ EN61000-4-4
 - ✓ EN61000-4-5
 - ✓ EN61000-4-6
 - ✓ EN61000-4-8
 - ✓ EN61000-4-11

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


Typical model list

Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option / Remark
UNWVU3010-050020SA	5.0V	2.0A	±5%	150mV	200mV	78.70%	0.1W	
UNWVU3010-090013SA	9.0V	1.3A	±5%	200mV	300mV	82.83%	0.1W	
UNWVU3010-120600SA	12.0V	0.6A	±5%	240mV	240mV	80.01%	0.1W	
UNWVU3010-120010SA	12.0V	1.0A	±5%	240mV	300mV	82.96%	0.1W	
UNWVU3010-150800SA	15.0V	0.8A	±5%	300mV	300mV	82.96%	0.1W	
UNWVU3010-240500SA	24.0V	0.5A	±5%	300mV	300mV	82.96%	0.1W	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

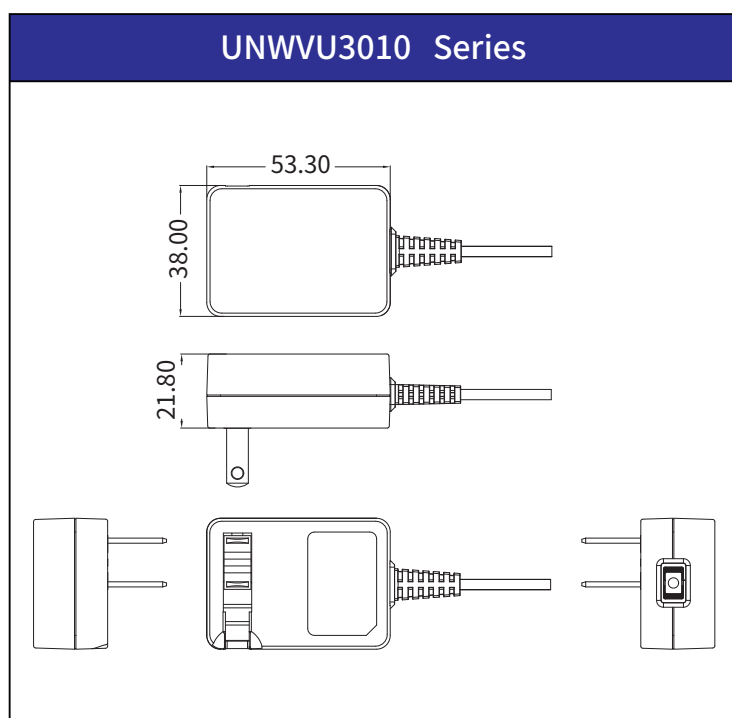

■ Please contact our sales department for details of each model ■