


# UxOAT 12W Series

Medical/Home/I.C.T. - Open Frame  
Standard Product



▲ UxOAT3012

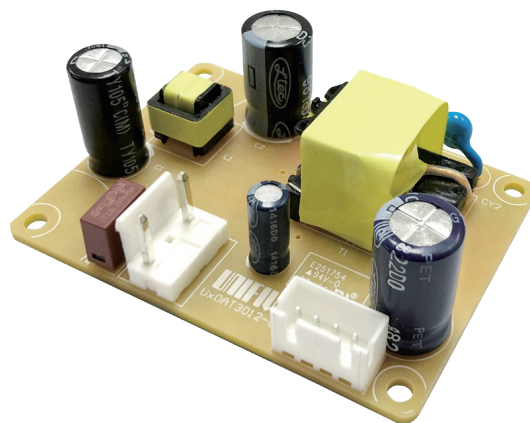

■ Please contact our sales department for safety standard of each model.

## Model Name Definition

# UxOAT3012

x : Depend on Safety Standard

- M 60601-1
- H 61558-1/60335-1
- N 62368-1/60065-1/60950-1

## Product Highlights

- Stability
- Energy and High Efficiency
- PCB Size 1.7"x 2.4"(inch)
- Appendix 8 of PSE :  
comply with dusty requirement
- Suitable for devices with built-in power supply
- The lifespan of the power supply is 5 years.

## Efficiency

- Energy Efficiency Level VI ( ErP / DoE )
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

## Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

## Emissions

- FCC
  - FCC Part15-B
  - FCC Part18-B
- CE
  - EN(CISPR)55032-B
  - EN(CISPR)55011-B
  - EN(CISPR)55014-B
- BS EN 55032
- BS EN55011
- BS EN55014-1

## Safety Standard

- 62368-1
- 60601-1
- 61558-1
- 60335-1
- PSE 別表第八  
100V 基準に準拠

## Immunity

- EN55035
- BS EN 55035
- EN60601-1-2
- BS EN60601-1-2
- EN55014-2
- BS EN55014-2

The above specifications include the following test standards

- ✓ EN61000-4-2
- ✓ EN61000-4-3
- ✓ EN61000-4-4
- ✓ EN61000-4-5
- ✓ EN61000-4-6
- ✓ EN61000-4-8
- ✓ EN61000-4-11

## Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	50	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing

## Typical model list


Output Port	Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Option / Remark
CN2	UxOAT3012-050020SA	5.0V	2.0A	±5%	240mV	240mV	
	UxOAT3012-090013SA	9.0V	1.3A	±5%	240mV	360mV	
	UxOAT3012-120010SA	12.0V	1.0A	±5%	240mV	360mV	

### ■ Measurement Condition


1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

TOLERANCE: ±0.5  
Unit:mm


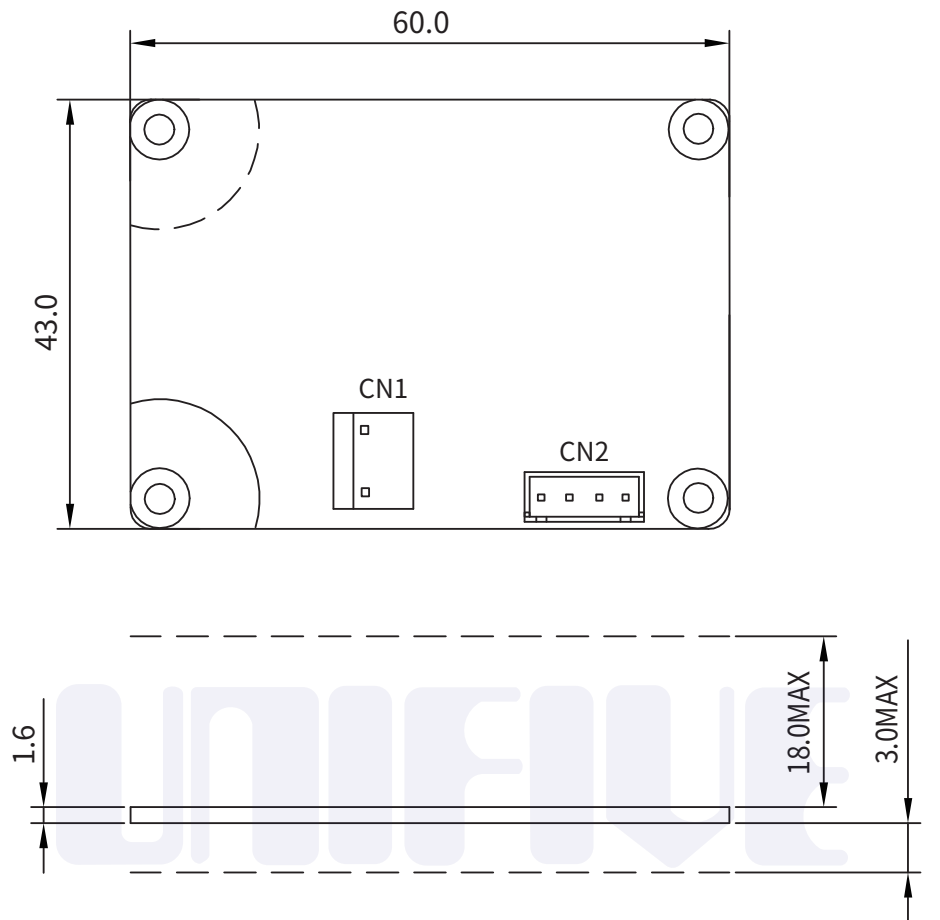


CN1



AC INPUT

CN2

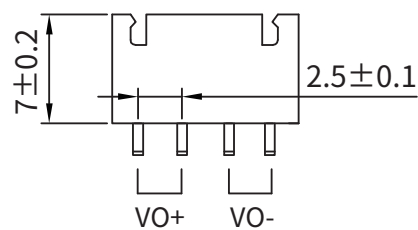

CN1

PIN NUMBER	INPUT
1	AC(L)
2	
3	AC(N)
<b>CN1 : INPUT CONNECT</b> Specifications are equivalent to models of JST B3P-VH	

CN2

PIN NUMBER	OUTPUT
1,2	VO+
3,4	VO-
<b>CN2 : OUTPUT CONNECT</b> Specifications are equivalent to models of JST B4P-VH	

■ Please contact our sales department for details of each model ■